



TIGER P

Universal, two-sided
emergency lighting fitting

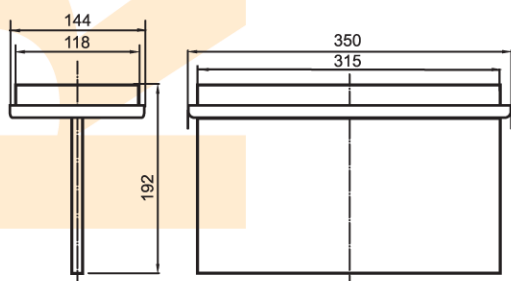

Materials:

white polycarbonate body
transparent polycarbonate cover

Mounting:

ceiling or optional: dry-wall or under plastering

Specifications:

- 230V 50Hz power supply
- Charge time – 24 hours
- Electric power network and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W
- Insolation class II
- Protection level IP42
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 20 m
- Connecting clips 3x2,5 mm²
- Compatibility with standard specifications EN 60598, EN 1838
- Optional PT or RS

STANDARD

Configuration of fitting

type	time [h]			work		option	
TP	1	2	3	SE	SA	PT	RS

AUTOTEST

Configuration of fitting

type	time [h]			autotest	option	
TP	1	2	3	AT	SE	SA

FOR CENTRAL BATTERY

Configuration of fitting

type	central bat.
TP	CB

NETWORK

Configuration of fitting

type	network
TP	S

power [W]	cap
8	G5

Configuration made of order code - page 35
Accessories - page 32
RUBIC system description - page 6-7

LEGEND

SE - NON-MAINTAINED

SA - MAINTAINED

PT - MANUAL TEST BUTTON

RS - RUBIC MONITORING SYSTEM

AT - AUTOTEST

S - NETWORK

CB - FOR CENTRAL BATTERY EVG

TP - TIGER P FITTING