



HELIOS DS



Universal, two-sided
emergency lighting fitting

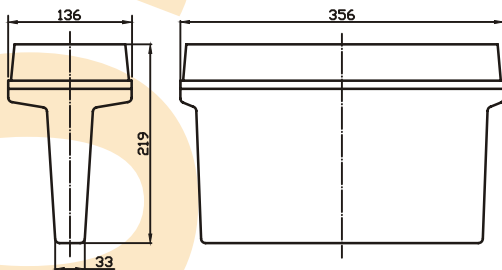

Materials:

white polycarbonate body
opal polycarbonate cover

Mounting :

ceiling

Specifications:

- 230V 50Hz power supply
- Charge time – 24 hours
- Electric power network and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W
- Insulation class II
- Protection level IP42, IP65
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 25 m
- Connecting clips 3 x 2,5 mm²
- Compatibility with standard specifications EN 60598, EN 1838
- Optional PT or RS

STANDARD HDE - IP42

Configuration of fitting

type	time [h]	work	option
HDE	1 2 3	SE SA	PT RS

STANDARD HD - IP65

Configuration of fitting

type	time [h]	work	option
HD	1 2 3	SE SA	PT RS

AUTOTEST - HDE IP42

Configuration of fitting

type	time [h]	autotest	work
HDE	1 2 3	AT	SE SA

AUTOTEST - HD IP65

Configuration of fitting

type	time [h]	autotest	work
HD	1 2 3	AT	SE SA

FOR CENTRAL BATTERY

Configuration of fitting

type	centr. bat.	IP
HDE	CB	42
HD	CB	65

NETWORK

Configuration of fitting

type	network	IP
HDE	S	42
HD	S	65

power [W] cap

8	G5
---	----

Configuration mode of order code - page 35
Accessories - page 32
RUBIC system description - page 6-7

LEGEND

SE - NON-MAINTAINED
SA - MAINTAINED
PT - MANUAL TEST BUTTON
RS - RUBIC MONITORING SYSTEM

AT - AUTOTEST
S - NETWORK
CB - FOR CENTRAL BATTERY EVG
HDE - HELIOS DS IP42 FITTING,
HD - HELIOS DS IP65 FITTING